

Central Laboratory Operations Laboratory Test Report

Test Number: 101508-2

Date Completed: 10-23-2008

Product Information:

Division: Design Origins

Style: Lakeshore SoftBac

Test Conducted: ASTM E 662-95 - Specific Optical Density of Smoke
Generated by Solid Material

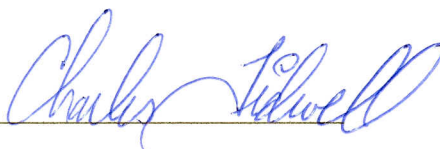
Predrying: 24 hours at 140 degrees F

Conditioning: 70 +/- 2 degrees F and 50 +/- 5 % RH

Flaming Results:

Specimen #	1	2	3
Maximum Specific Optical Density (DM)	269	222	197
Clear Beam (DC)	27	17	16
DMC (Corrected DM)	242	205	181
Specific Optical Density @4.0 minutes	261	204	174

Average Specific Optical Density (DMC): 209

Approved by: 

Note: This report shall not be reproduced except in full, without the written approval of the laboratory.

* This facility is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP) for the specific scope of accreditation under Lab Code 100193-0. This report is provided for the exclusive use of the client to whom it is addressed. Results of the report are related only to the material identified and tested. This report can not be used by Shaw Industries, Inc. to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.